





BRF

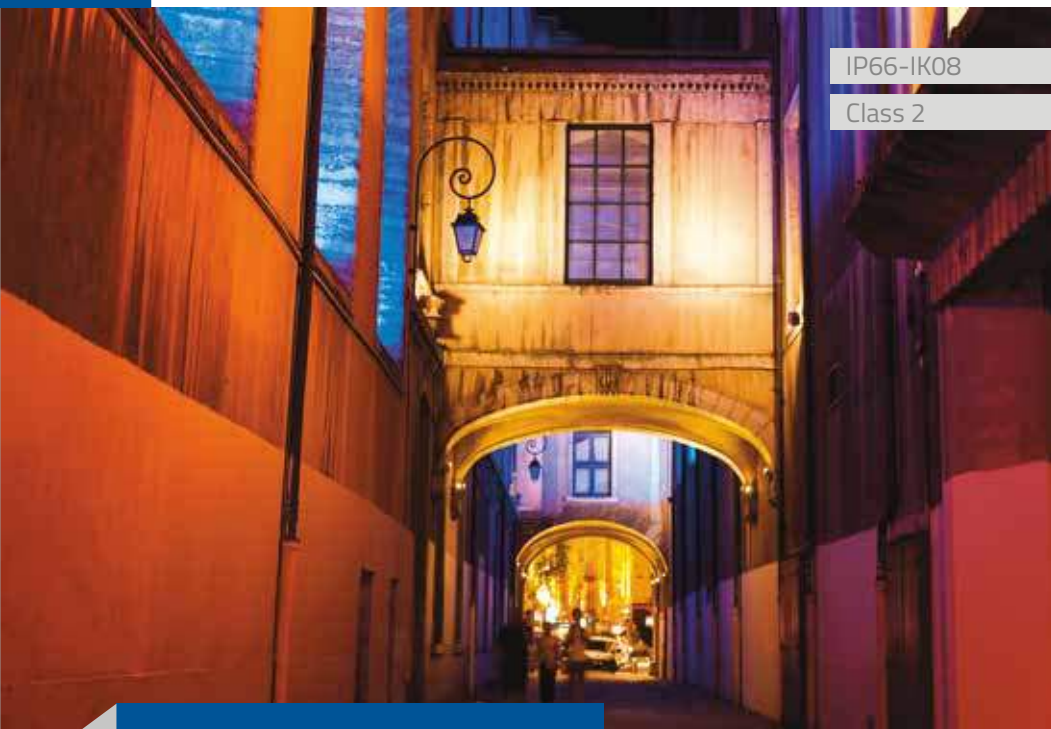

IP66-IK08

Class 2

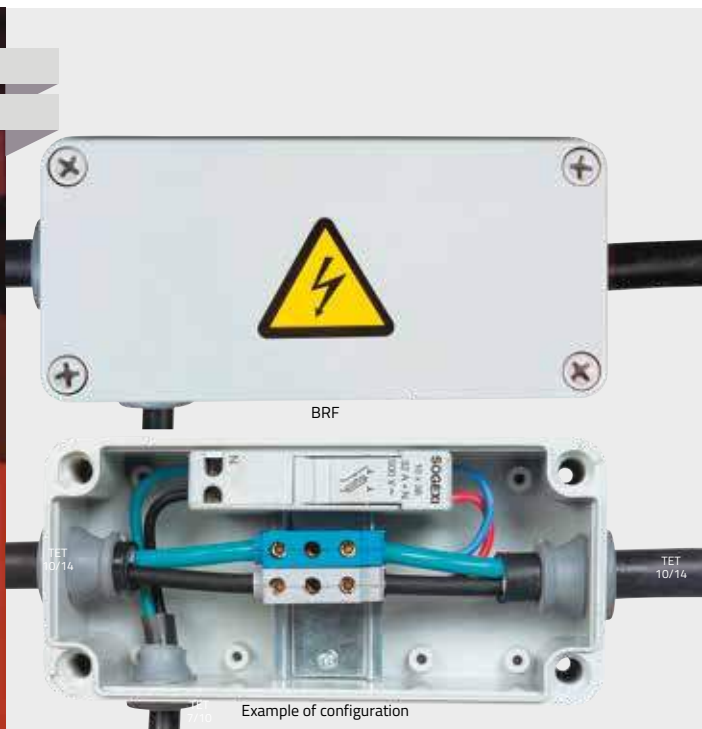

BRF

Example of configuration

This compact junction base is generally used as a wall-mount network junction box.

Class 2 design and high protection rating: IP66.

Option: BRF sound system with shielded cable (length as per customer specifications) and 3-pin XLR plug.

ADVANTAGES

Compact footprint.

IP66 protection rating.

TECHNICAL CHARACTERISTICS

Max. capacity

- BRF: up to 1 pass-through cable Ø 14 mm (Ø 20 mm: please contact us) and one output cable Ø 10 mm (2 cables: please contact us).
- Maximum capacity: useful length of the rail: 70 mm.

Mounting

- Mounting via the bottom of the box.

Casing

- Polycarbonate, self-extinguishing.
- IP66 (open box: IP2X).
- IK08 in accordance with EN 62262.
- Class 2.
- -40°C to +120°C.

Product standards

- EN 50298.

Installation standards

- NF C17-200.

Standard colours:

- Please contact us for other colours.

