

# SAE-FW-5-GATE-4G

WITH INTEGRATED LTE MODEM



## SECURE CONNECTION WITH THE NEW TECHNOLOGY series5X

As a field device, the SAE-FW-5-GATE-4G has the full performance of the new series5X generation plus a flexible mobile radio connection. The extremely compact field device in a robust top-hat rail housing contains all components for monitoring, controlling, archiving and transmitting a powerful telecontrol and automation system via mobile radio. The integrated use of a modern LTE radio module with fallback to 3G/2G networks enables flexible integration into control and energy management systems. The series5X technology offers further improvements in terms of functionality, security and future viability for telecontrol applications. Thanks to the established setIT parameterization software and fast commissioning via USB OTG or SD card, it sets new standards in the field device segment.



## TYPICAL APPLICATIONS



- Intelligent local network station with Integration of power measurement terminals, earth/short-circuit indicators, grid analysis systems and protection devices
- Feed-in management in renewable energy plants
- Control box for direct marketing, balancing energy and Redispatch 2.0 applications
- Monitoring and control of pipe-bound media and infrastructure systems, such as street lighting
- Interconnection of virtual power plants
- Transparent protocol converter for conversion between IEC-101 and IEC-104

## IMPORTANT FEATURES

### SAE-FW-5-GATE-4G Hardware

- Mobile radio module LTE with diversity antenna supports MISO (multiple input, single output) operating mode
- 2 separate Ethernet interfaces for 3 independent LAN segments
- 2 EIA/RS-485 interfaces
- Embedded temperature sensor
- microSD card, 1 GB on the front
- Supply voltage 24 V DC - galvanic isolation and wide-range supply possible with additional module
- High-performance CPU with 1 GB memory and secure element for secure boot
- Enables integration into our **device management system** (LXCONNECT)\*

### SAE-FW-5-GATE-4G Software



- Complex integration of standard protocols for:
  - IEC 60870-5-104
  - IEC 60870-5-101/- 103
  - IEC 61850 client und server, GOOSE Messages (with time restrictions)
  - DNP3 outstation/master
- MQTT (publish & subscribe) for cloud-based communication; optionally with Sparkplug specification
- Meter coupling according to IEC 62056-21
- SNMPv3 protocol for status messages from network components
- SNMP agent for integration into asset management
- Selective archive query via IEC-101/-104
- Flexible archive exports
- Protocol converter mode for conversion without process data configuration

## THE TECHNOLOGY series5X

The communication requirements for a telecontrol/station control system in an intelligent network are constantly increasing. At the same time, greater demands are being placed on security in the networks, as increasing networking means that the risks of unauthorized access and manipulation are growing. Thanks to a more modern processor core, the updated operating system, secure boot and an encrypted file system for the configuration partition, series5X offers improved protection against cyber attacks.




- Secure boot and signed base system
- Encapsulation, hidden layer, BGA (tamper protection)
- Unique device certificate for station authentication
- LAN PHYs interfaces can be disabled
- Encrypted file system of the configuration partition
- Signed configuration
- VPN, IPsec, TLS encryption
- Integration into the central device management system (LX CONNECT)\*
  - Update of the basic system
  - Ward software & configuration can be updated individually
  - Fallback (AB system) for base system and configuration
  - Certificate exchange via EST (Enrollment over Secure Transport)

\*in Preparation

## SAE - OUR VIEW OF THE BIG PICTURE

In combination with SAE's own expansion modules (EWB) or by connecting external devices, the SAE-FW-5-GATE-4G opens up numerous possibilities. A wide range of information can be exchanged with various back-end systems, such as control centers.

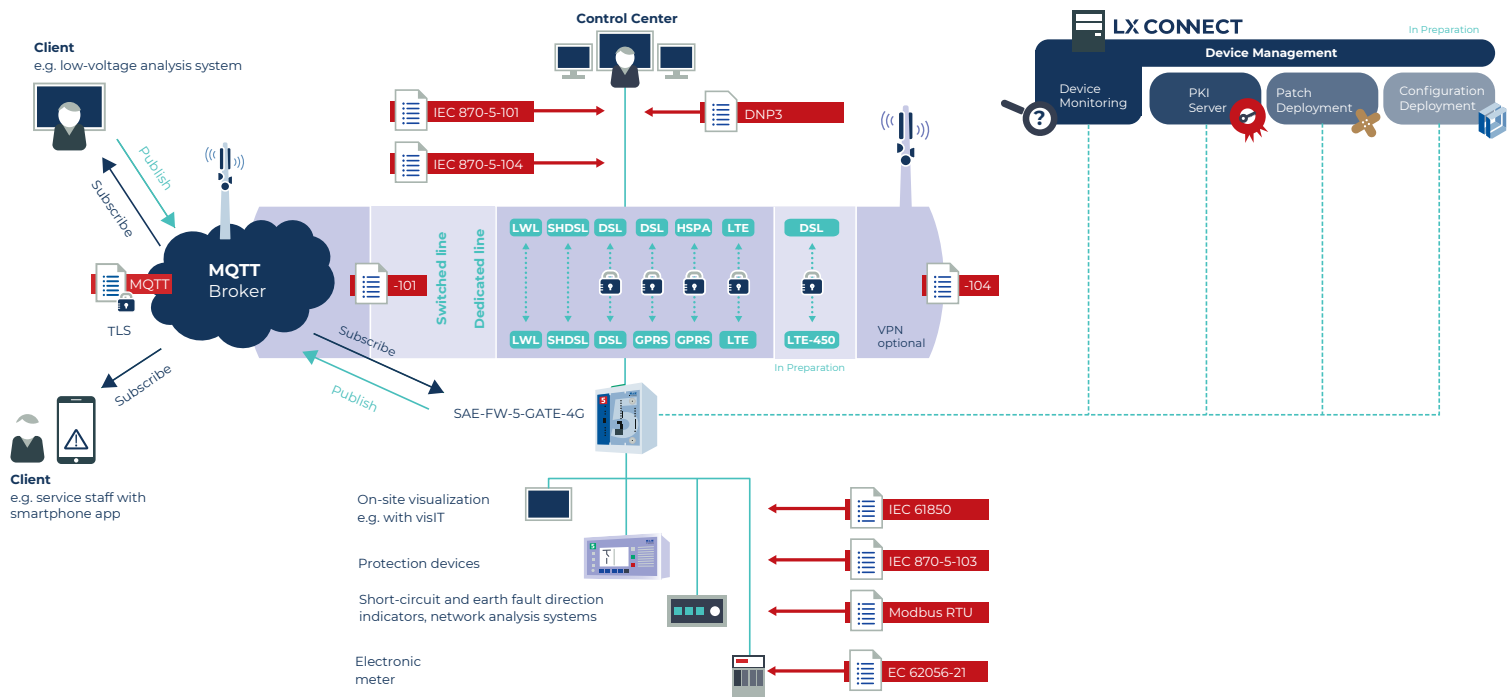

On request, SAE can take over the complete project management with its comprehensive know-how. This includes the selection of suitable components, the coordination of all project participants through to the actual integration of the systems into existing infrastructures.

# Expansion modules



The SAE-FW-5-GATE-4C can be extended with up to 12 expansion modules flexibly and as required via an internal bus system. If the power supply of the base station is not sufficient, the PWR-1 power booster can provide additional power. The TBUS extension also allows the integration of remote EWBs. The screw or spring clamp terminals of the base unit and the EWB modules are removable; the terminals of the PM-1 / PM-2 are fixed.

## Displays and commands

- 8DI 8 Notifications
- 8DI2AI 8 displays + 2 measured values
- 8DO 8 commands

## Measured values and setpoints

- 4AI 4 measured variables
- 2AO 2 analog setpoints
- 4AO 4 analog setpoints

## Command termination

- DSO-1 6 command relays 1.5-pole with feedback display
- DSO-2 4 command relays 2-pole with feedback display

## Units for special tasks

- 4DI4DO 4 Notifications  
4 mono/bistable changeover relays
- RES-1 4 S0 displays + 2 measured values  
4 command relays
- VPP-1 6 displays + 2 measured values  
5 command relays + 2 setpoints
- PM-1/PM-2 Power measurement card for LV/MV networks
- ISO-1/PIT-1 Leakage detection, monitoring of district heating networks and pipelines

## SUPPLIES

- PWR-1 Current booster for larger large volume systems
- TBUS-T T-bus extension transmitter
- TBUS-R T-bus extension receiver

## PRODUCT VARIANTS & SUPPLIES

### FW-5

Base unit FW-5

### FW-5-GATE

2 Ethernet/LAN interfaces  
2 RS-485 field & meter connections  
1 RS-232/V.24 interface

### FW-5-GATE-LTE450

2 Ethernet/LAN interfaces  
2 RS-485 field & meter connections  
1 RS-232/V.24 interface  
450 MHz LTE module

# TECHNICAL DATA

Main functions	Details	
<b>CPU</b>	series5x ARM processor core, Cortex® A7@800 MHz, FPU, watchdog, real-time clock, secure element <b>1 GB memory:</b> 512 MB SDRAM, 512 MB SLC NAND Flash, 1 MB NOR Flash 1.8 GB pSLC eMMC flash, 128 kB SRAM buffered 60 days	
<b>Interfaces</b>	2 Ethernet LAN TCP/IP, 10/100BaseTx, 100 MBit/s auto-MDIX, auto-negotiation 1 V.24/RS-232, RJ-45, up to 115 kBit/s, max. 20 m, galvanically isolated from power supply and I/O 2 RS-485, terminal, up to 115 kbit/s, max. 31 participants, end termination, electrically isolated USB-OTG device/host USB 2.0 480 MBit/s, mini type B socket	
<b>Protocols</b>	<b>IEC 60870-5-101</b> <b>IEC 60870-5-103</b> <b>IEC 60870-5-104</b> <b>IEC 61850 ed2</b> <b>DNP3</b> <b>Modbus</b> <b>MQTTv3</b> <b>IEC 62056-21</b> <b>DSFG</b> <b>LACBUS-RTU</b> <b>Profibus</b> <b>3964R/RK512 S7</b> <b>SNMPv3</b> <b>https</b> <b>IPsec IKEv1, IKEv2</b> <b>OpenVPN</b> <b>SYSLOG</b> <b>LDAP / Radius</b> <b>DHCP/DNS</b> <b>NTP-/DCF-</b> <b>IEC 61131-3</b>	Telecontrol technology, station control technology Protective device coupling TCP / IP control center coupling Stationsbus client / server (optional) master / outstation, serial / TCP RTU / TCP Master / Slave Datasever publisher / subscriber Meter interface (formerly IEC 1107) Interface for gas Gateway SOFREL Data logger DP slave Coupling Status messages via master/agent Secure communication Encryption / VPN tunnel TLS encryptions Central message server Central user administration dynamic IP address Clock synchronization compatible via straton, program memory 128 kB, PLC programming
<b>Communication</b>	LTE Modem 4G mit Fallback 2G	
<b>Transmission</b>	<b>3GPP Release 11</b> LTE Cat 1, 10 MBit/s down, 5 MBit/s up	
<b>Frequency bands</b>	4G FDD LTE:B1/B3/B5/B7/B8/B20/B28 2G GSM: B3/B8 900/1800 MHz	
<b>Antenna</b>	MIMO DL , SMA-f	
<b>Input/output</b>	Modular expansion via max. 12 I/O modules	
<b>Memory expansion</b>	1 GB SD-Card	
<b>Real-time clock</b>	Deviation max. ±10 ppm in operation maintenance-free buffer ±20 ppm 60 days @25°C daylight saving time changeover, leap year correction	
<b>Status displays</b>	LED for power, process status of the PLC, system, communication Diagnostics via integrated web server, visIT system visualization (optional)	
<b>Service interface</b>	Ethernet-LAN 10/100BaseTx, auto-MDIX, USB-OTG device/host USB 2.0 480 MBit/s, mini type B socket	
<b>Control element</b>	service button for configuration/backup/recovery function	
<b>Fault signal output</b>	Parameterizable on relays of an expansion module	
<b>Power Supply</b>	24 V DC (-15%/+20%), no galvanic isolation Power failure management with power fail buffering With additional expansion module PS-60: 24 to 60 V DC (-15% + 20%), insulation 1500 V	
<b>Dielectric strength</b>	5 kV surge supply & process I/O to PE, according to class VW3 2.5 kV surge supply to measurands, RS-232, USB	
<b>Standards</b>	<b>Health&amp;Safety:</b> <b>EMC:</b> <b>Spectrum:</b> <b>RoHS:</b> <b>MTBF:</b>	EN 62368-1 & EN 62311 ETSI EN 301 489-1 & ETSI EN 301 489-52 & EN 55032 & EN 61000-6-2 ETSI EN 301 511 & ETSI 301 908-1 & ETSI 301 908-2 DIN EN IEC 63000 64a @ 40°C according to SN 29500
<b>Housing</b>	Polyamide V0, IP20, weight: 280 g Dimensions: 68×105×115 mm (W×H×D) Extension modules: 22.5×105×115 mm (W×H×D)	
<b>Assembly</b>	<b>DIN-top-hat rail</b> DIN EN 60715 TH35 horizontal	
<b>Clamps</b>	MSTBT screw terminal, 0,2 to 2,5 mm <sup>2</sup> or FKCT spring terminal, 0,2 to 2,5 mm <sup>2</sup>	
<b>Ambience</b>	-25 to +70° C, max. 3000 m above sea level, relative humidity <95%, without condensation	