

SOFREL Sensors

Sensors portfolio for water networks








SOFREL Sensors

A RANGE OF SENSORS DESIGNED TO SUIT EVERY NEED




LACROIX OFFERS A RANGE OF SENSORS
AND TOOLS DESIGNED FOR OPTIMAL OPERATION
WITH SOFREL DEVICES

THE ADVANTAGES OF LACROIX'S ASSISTANCE AND EXPERTISE

-  Benefit from **expert advice**
-  A **turnkey solution** at your disposal
-  Enjoy **better performance**
-  **Industrial quality** guaranteed
-  **Free and responsive technical support**

Applications for the **Smart Water market** :

- ▶ Level measurement in reservoirs, combined sewer overflows, natural environments and lifting station
- ▶ Pressure monitoring in drinking water distribution networks
- ▶ Water quality control and pollution detection

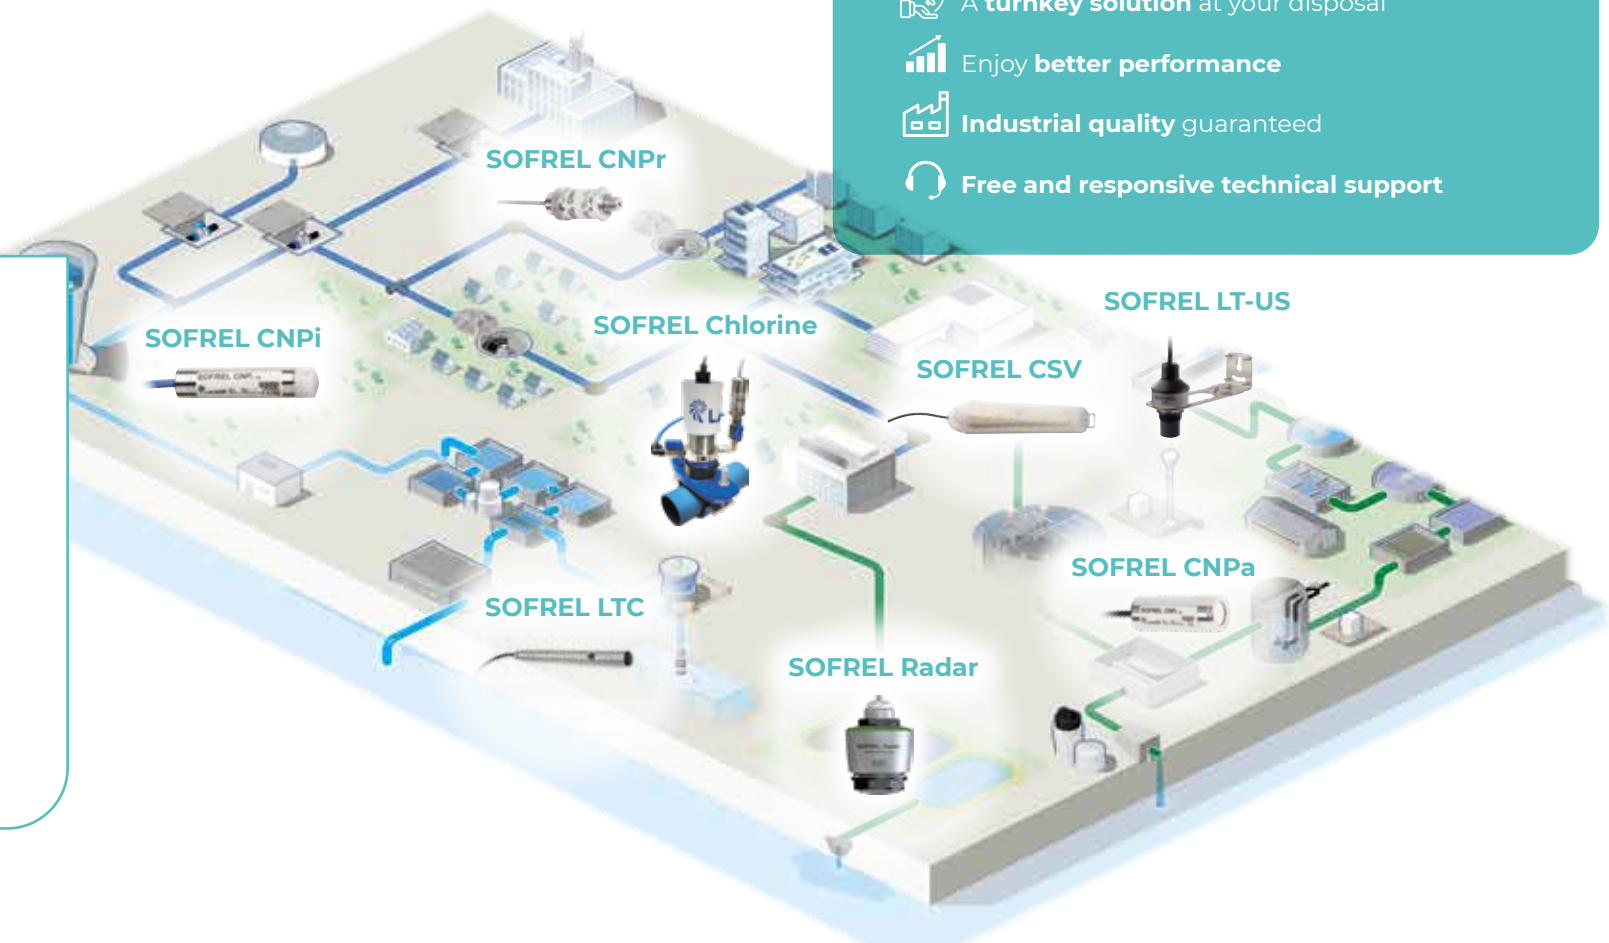

Smart Water

LEVEL MEASUREMENT

SOFREL CNPi



Immersed piezo-resistive level sensor with a high-quality stainless steel membrane, for measuring drinking water levels.


Featuring ACS certification, this sensor facilitates water level measurement in reservoirs, tanks, boreholes, etc.

It determines water depth by measuring the differential pressure between the surface of the liquid and the bottom of the reservoir in which it is submerged.

Technical Information

Technology	Immersed piezo-resistive sensor with high-quality stainless steel membrane
Measurement	Output: 4 - 20 mA Measurement range: 0-6 m or 0-10 m as standard, or specific to be defined Accuracy: $\pm 0.35\%$ FSO as per IEC60770
Power supply	7 to 30 VDC Low consumption Built-in over-voltage protection
Temperature	-10°C to +70°C
Cable	With vent to atmosphere capillary 9 metres in length for the 0-to-6-m version 13 metres in length for the 0-to-10-m version Specific length (to be defined)
Certification	ACS (Certificate of Sanitary Conformity)

SOFREL CNP α



Submersible sensor for measuring sewage water levels.

This submersible pressure sensor with capacitive ceramic membrane is ideally suited for waste water or sewage water (lift stations, waste water treatment networks).

It determines water depth by measuring the differential pressure between the surface of the liquid and the bottom of the reservoir in which it is submerged.

Technical Information

Technology	Immersed sensor with capacitive ceramic membrane
Measurement	Output: 4-20 mA Measurement range: 0-3 m or 0-6 m as standard, or specific to be defined Accuracy: $\pm 0.35\%$ FSO as per IEC60770
Power supply	9 to 36 VDC Low consumption Built-in over-voltage protection
Temperature	-10°C to +70°C
Cable	With vent to atmosphere capillary 10 metres in length for the 0-to-3-m version 15 metres in length for the 0-to-6-m version Specific length (to be defined)

Smart Water

LEVEL MEASUREMENT

SOFREL CSV



Capacitive sensor for detecting an overflow during periods of rainfall.

Typically installed in combined sewer overflows, this sensor detects effluent flow


and relays the duration and number of overflows into the environment.

This sensor requires regular maintenance as it is in contact with effluent.

Technical Information

Technology	Capacitive sensor
Output	Digital link
Watertightness	IP68
Temperature	-20°C to +50°C
Cable	10 metres
Dimensions	290 x 74 x 44 mm

SOFREL US SENSOR



0-3 m ultrasound sensor (US) for measuring levels without coming into contact with effluent.

Compatible with the SOFREL LT-US data logger only, this sensor can be installed in combined

sewer overflows, water purification basins, pumping stations, rainwater collection basins, for level and flow measurement in open channels.


Technical Information

Technology	Contact-free ultrasound level measurement sensor
Measurement	LT-US output only Measurement range: 0-3 m Accuracy: ≤ 3 mm Beam angle: 8°
Power supply	via SOFREL LT-US only
Temperature	-20°C to +50°C
Cable	5 or 10 metres

Smart Water

LEVEL MEASUREMENT

SOFREL C11



4–20 mA/0–8 m radar sensor for measuring levels without coming into contact with effluent.


It can be installed in combined sewer overflows, water purification basins, pumping

stations, rainwater collection basins, for level and flow measurement in open channels.

Technical Information

Technology	Contact-free radar level measurement sensor
Measurement	Output: 4 - 20 mA Measurement range: 0 - 8 m Accuracy: ≤ 5 mm (check the analogue input resolution of the remote monitoring product) Beam angle: 8° Radar measurement frequency: W band (80-GHz technology)
Power supply	12 to 35 VDC
Temperature	-40°C to +60°C
Cable	10 metres
Connection	G1 ½ thread (nut included)
Watertightness	IP66/IP68 (3 bar, 24 hrs) as per IEC 60529, type 6P as per UL 50

SOFREL C22

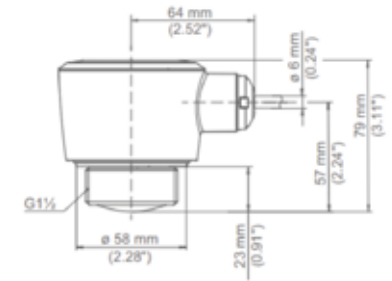

4–20 mA radar sensor or 0–15 m Modbus for measuring levels without coming into contact with effluent.

It can be installed in combined sewer overflows, water purification basins, pumping

stations, rainwater collection basins, for level and flow measurement in open channels

Technical Information


Technology	Contact-free radar level measurement sensor
Measurement	Output: 4–20 mA or Modbus Measurement range: 0 to 15 m Accuracy: ≤ 2mm Beam angle: 8° Radar measurement frequency: W band (80-GHz technology)
Power supply	12 to 30 VDC
Temperature	-40°C to +80°C
Cable	5 metres
Connection	G1 ½ thread (nut included)
Watertightness	IP66/IP68 (3 bar, 24 hrs) as per IEC 60529, type 4X/6P as per UL 50



Smart Water

PRESSURE MEASUREMENT

SOFREL CNPr



Piezo-resistive pressure sensor for 1/4-inch DIN 3852 gas connection to high-quality stainless steel membrane for clean water.

This sensor facilitates pressure measurement in drinking water distribution networks, in


order to detect leaks and monitor the quality of the service.

Technical Information

Technology	Screw-on piezo-resistive sensor with high-quality stainless steel membrane
Measurement	Output: 4 - 20 mA Measurement range: 0-16 bar or specific (max. 40 bar) Accuracy: $\pm 0.35\%$ FSO as per IEC60770 Overpressure: up to 60 bar for the standard model
Power supply	7 to 30 VDC
Temperature	25°C to +85°C
Cable	3 metres Cylindrical 1/4-inch gas connector DIN 3852, watertight gasket, screw-on connector with $\varnothing 27$ -mm spanner
Watertightness	IP68

QUALITY MEASUREMENT

SOFREL Chlorine



Complete kit for monitoring chlorine propensity online and at alert stations.

SOFREL Chlorine remotely monitors chlorine levels in drinking water distribution networks and alerts contract operators if it detects that an alert threshold has been reached.

Featuring ACS certification, this kit is made

up of a chlorine sensor, an assembly device, a SOFREL LS42 data logger, a sampling valve and an additional pressure sensor output. It can be easily deployed in loaded pipes (steel, fibre cement, cast iron, PE and PVC-O) continuously along the water distribution network.

Technical Information

Technology	Amperometric measurement
Measurement	Output: 4 - 20 mA Measurement range: 0.03-5 ppm Measurement resolution: 0,01 ppm Pressure measurement: 0 - 8 bars
Power supply	Remote 12-V supply via the SOFREL LS42 data logger lithium battery
Temperature	0°C to 50°C
Certification	ACS (Certificate of Sanitary Conformity)

Smart Water

QUALITY MEASUREMENT

SOFREL LTC



The SOFREL LTC facilitates measurement of the level and quality of groundwater, in order to preserve the environment and ensure sustainable management of water-based resources.

This sensor, connected to the SOFREL

DL4W-LP data logger or SOFREL S4W remote terminal unit via Modbus, facilitates regular monitoring of the state of underground aquifers by measuring levels, temperature and conductivity.

Technical Information

Measurement	Modbus output
Dimensions	Ø 22 mm x 223 mm
Power supply	via SOFREL DL4W or SOFREL S4W
Watertightness	IP68
Cable	Specific length (to be defined)

Level Measurement

Technologie	Relative pressure (with capillary) Piezo-resistive probe
Measurement range	0 to 0.3/1/3/10 bar / 0 to 3/10/30/100 m
Accuracy	± 0.05% FS (± 0.04% FS for the 0-to-0.3-bar version)
Resolution	0 to 50°C

Temperature Measurement

Technologie	PT1000
Measurement range	10 to 80°C
Compensated measurement range	0 to 50°C
Accuracy	± 0,1° C

Conductivity Measurement

Technologie	6 titanium electrodes
Measurement range	0 to 0.2/2/20/200 mS/cm
Accuracy	<2.5% of the range



CONNECTED
TECHNOLOGIES
FOR **SMARTER**
WATER &
ENERGY



LACROIX - **Environment**

2, Rue du Plessis

35770 Vern-sur-Seiche · France

Tel: +33 (0)2 99 04 89 00

info.environment@lacroix.group

www.lacroix-environment.com